

RVP351 HPI-TP250W K IC S

Kod produktu: 58875



Dane techniczne:

- Full product code **910502548518**
- Full product name **RVP351 HPI-TP250W K IC S**
- Order code **910502548518**
- Order product name **RVP351 HPI-TP250W K IC S**
- Pieces per pack **0**
- Bar code on outerbox - EAN3 **8711559149714**
- Packs per outerbox **1**
- Logistic code(s) - 12NC **910502548518**
- Net weight per piece **7.540 kg**
- Product family code **RVP351 [RVP351]**
- Number of light sources **1 [1 pc]**
- Kombipack **K [Lamp(s) included]**
- Lamp family code **HPI-TP [MASTER HPI-T Plus]**
- Lamp power **250 W [250 W]**
- Compensation circuit **IC [Inductive parallel compensated]**
- Gear **CONV [Conventional]**
- Optic type **S [Symmetrical]**
- Ingress protection code **IP65 [Dust penetration-protected, jet-proof]**
- Protection class IEC I **[Safety class I]**
- Mech. impact protection code **IK07 [2 J reinforced]**
- CE mark **CE [CE mark]**
- ENEC mark **No**
- Glow-wire test **850/5 [Temperature 850 °C, duration 5 s]**

RVP351 - MASTER HPI-T Plus - 250 W - Symmetrical



Tempo is a complete floodlighting range offering a wide choice of lamp types and symmetrical and asymmetrical reflectors. It is designed for general-purpose floodlighting, and is particularly suited to small- to medium-scale area or surface lighting. The Tempo series' compact housing guarantees optimum visual integration. Anodized-aluminum reflectors ensure a highly efficient beam distribution, while the nylon bolt caps feature a goniometric aiming device for easy adjustment and alignment. A universal mounting bracket allows ceiling, wall or surface mounting with a wide range of adjustment for both down- and uplighting. Tempo's all-weather construction is designed to make cleaning and servicing easy and fast. Access to the lamp and gear is simple, via the hinged front glass with its quick-release stainless-steel clips. All Tempo luminaires are RoHS-compliant.

Features

Wide choice of lamp types
 Symmetrical and asymmetrical reflectors
 Compact housing with metallic grey finish
 Aiming device
 Hinged front glass with quick-release clips

Applications


Facades
 Area lighting
 Architectural lighting
 Billboards

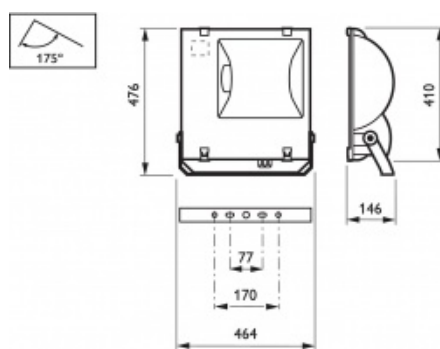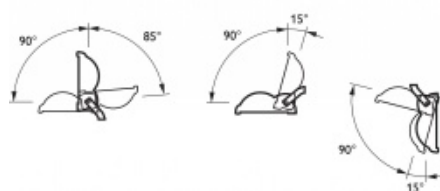

RVP351 1xHPi-TP250W 8

L.O./R.=0.70

1 x 25000 lm

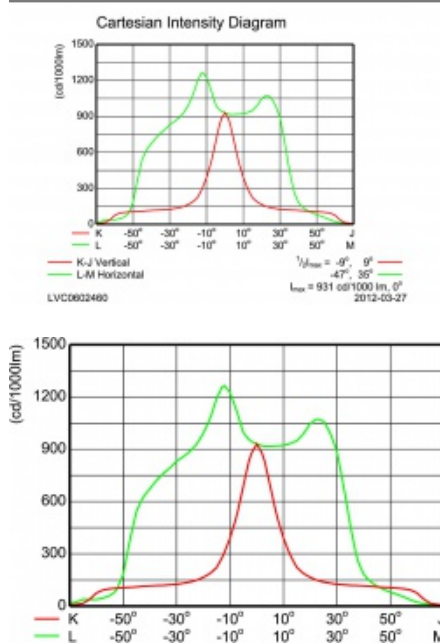



CE